



Video Cassette Recorder 30-hr Real-Time, 960-hr Time-Lapse A-V960TLJ2

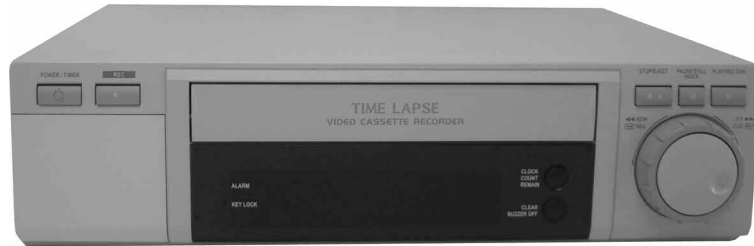

Product Summary

The A-V960TLJ2 four-head continuous-time, real-time / time-lapse video recorder is an advanced, high quality video / audio recorder designed for use with all video surveillance security systems. The unit is capable of 30 hour real-time continuous recording in color or B&W with a 12 fps recording rate using a T-120 tape. The A-V960TLJ2 is designed for recording over an extended length of time starting at 72-, 96-, 120-, 168-, 240-, 480-, up to 960 hours (40 days) using a T-120 tape or 1285 hours using a T-160 tape. The unit features jog/shuttle operation for use in videotape search modes and programming setup.

The A-ADRLB is a secure lock box designed for both VCRs and the ADRP series digital video recorders. The lock box features an extended cable port on the rear of the chassis and a removable top cover for ease of installation. The unit offers a hinged keyed front door permitting access to the unit. The lockbox may be rack mounted using supplied mounting hardware.

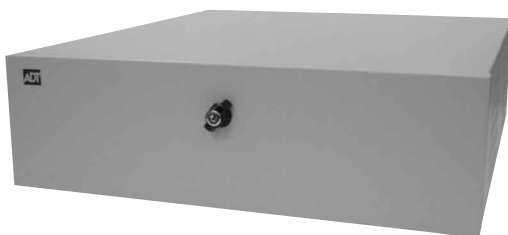

XDLBW2

Features

- Intended for use with all video surveillance systems.
- Jog/shuttle operation.
- Real-time 30-hour record (12 fps).
- Time-lapse recording from 30 to 960 hours.
- Includes RJ-11 to VCR cable.
- Dual-mode on-screen display.
- Linear audio recording (<30 hour).
- Flexible timer recording (per day or week).
- Alarm record and scan.
- Power failure recall.
- 30-day battery backup.

Ordering Guide:

SCN#	Item
A-V960TLJ2	VCR, 30-hr real-time, 960-hour TL, jog and shuttle
A-XDLBW2	VCR/DVR Lock Box

Specifications

General

Tape Format: 1/2" VHS
 Rewind Time: ~65 sec. (T-120)

Video Recording Time

RT: 6, 18, 30
 TL: 72, 96, 120, 168, 240, 480, 960 hr

Audio Recording Time

Linear Audio Rec.: 6, 18, 30 hr

Back Up Time

30 days

Timer

24-hour

Video Signal

NTSC/EIA (525 lines, 60 fps)
 1.0Vp-p (75 Ohms)

Resolution

300 TVL (B/W), 250 TVL (color)

Connections

Video In/Out: BNC
 Audio In/Out: RCA
 I/O Terminals: push-type terminal strip (12)

Dimensions (W x H x D)

14.2" x 3.7" x 10.7"

Weight

8.4 lbs (3.8 kg)

Power

15 Watts maximum

Operating Temperature

32°F ~ 95°F (0°C ~ 35°C)

Operating Humidity

Less than 80% RH

Optional Accessories	
XDLBW2	VCR lock box
A-A2VCBNC	VCR-to-monitor cable, 6', BNC/RCA connectors
A-AB50C	50' BNC to BNC cable

Record/Playback Modes					
Rec/Play Mode	T-120	T-160	Recorded Fields/Sec.	Tape Drive	Audio Recording
6H	6-hour	8-hour	60	High Density	Yes
18H	18-hour	24-hour	20	High Density	Yes
30H	30-hour	40-hour	12	High Density	Yes
72H	76-hour	101-hour	1.67	Time Lapse	No
96H	96-hour	127-hour	3.53	Time Lapse	No
120H	120-hour	160-hour	1.0	Time Lapse	No
168H	172-hour	229-hour	0.71	Time Lapse	No
240H	240-hour	319-hour	1.46	Time Lapse	No
480H	484-hour	645-hour	0.25	Time Lapse	No
960H	964-hour	1285-hour	0.125	Time Lapse	No

